



Scandinavian quality

www.proffwoodcare.com

A COMPLETE SYSTEM

Made with passion and respect for the wood



www.nowocoat.dk

COMPANY PROFILE

The company has a long history in production, development and sale of products for wood care and maintenance. The company was founded in 1861 on Vestergade Street, Kolding by manufacturer Arendt Dahl Burcharth. Later, his son, manufacturer Mathias Burcharth, joined him as co-owner, followed by Mogens Burcharth.

Mogens Burcharth built a new modern factory at 6 Gl. Donsvej Street in Kolding and production moved there in 1964.

Mogens Burcharth transferred the company to manufacturer Hans-Jürgen Müller, who has expanded the production, warehouse and laboratories in stages to make Burcharhts Farve og Lakfabrik an ultramodern industrial production site offering the best products for surface treatment of wood, metal, composite materials and concrete.

Today it is the Kjærgaard-Reinert family that runs the original company in the same spirit, focusing on quality based on innovation and ultramodern production equipment with the best lacquer and paint chemists working at the cutting-edge laboratory.

Just as at the very beginning, more than 160 years ago, when it started with paint products for wooden floors made by cooking linseed oils, stand oils, lacquer and diamond lacquer, the company continues to manufacture and refine natural raw materials collected from around the world, but the production process has been optimised so that the end products meet all modern age requirements particularly as regards environment, resistance to wear and easy application on the products that have to be protected in order to look beautiful for many years ahead.

So today we are proud of being able to present an ultramodern paint and lacquer factory founded back in 1861 in Kolding, which is still in Kolding. We have opened a museum in connection with our showroom. It shows the company's history and the development of both products and machinery. There is also a picture gallery of the company's owners and employees. All our customers who wish to have a look back at the company's 160-year history can do it there.



ADVANTAGES OF PROFF WOODCARE PRODUCT RANGE

Basic finishing, maintenance and care of wood

www.proffwoodcare.com

Nowocoat Industrial A/S ensures the best, natural care for your wood. Some of the many advantages of the Proff Woodcare product range are:

- NATURAL WOODCARE MEANS PRIMERS FOR BRINGING COLOUR TO THE WOOD
- NATURAL WOODCARE MEANS NATURAL OILS FOR PROTECTING THE WOOD
- NATURAL WOODCARE MEANS NATURAL SOAP FOR CLEANING THE OILED WOOD
- NATURAL WOODCARE MEANS NATURAL MAINTENANCE FOR REJUVENATING THE OILED WOOD

INNOVATION

Nowocoat Industrial A/S is a company whose top priority is quality, good products and effective logistics.

Our production, warehouse, laboratory and administration are top-tuned to meet any wishes and requirements from our quality-conscious clients.



Currently Nowocoat Industrial A/S has clients worldwide – from Finland in the North, through Europe to the USA and China.

This is so because we can fulfil the very broad range of product requirements on the different markets, including industrial application and special local requests concerning environmental requirements etc.

In order to support our environment and quality requirements, we are audited and certified by one of the best qualified and the most demanding certification agencies: DNV Det Norske Veritas, recognised everywhere in the world.

The Norwegian Veritas' certificates that we have obtained are the environmental certificate DS/EN ISO EN 14001 and the quality certificate DS/EN ISO EN 9001.



We also work closely with world-wide laboratory Eurofins, where we continuously test our product characteristics, including that they meet the requirements of EN 71-3 and DIN 53 160 emission etc. as well as that they are NMP- and NPE-free. Of course, we are also part of the Green Network.



We cooperate only with recognised laboratories such as the Danish Technological Institute or Eurofins. Furthermore, we also run tests at our own R&D laboratory, where we have the modern and demanding test equipment required for manufacturing the best possible products for our clients.

MISSION

We bring everlasting solutions to all our customers and our business model is based on long lasting customer relationships where trust and respect are building the foundation of our mutual success.

TRADITION

The Proff Woodcare product range is founded on the love for the natural raw material Wood - the proud traditions of craftsmanship and the Scandinavian tradition of finishing wood in a natural way using nature's own natural resources.



PROFF[®]
WOODCARE



INDEX

BASIC & INDUSTRIAL FINISHING

Maintaining and care of wood floors

EXTERIOR WOOD

Priming, finishing, maintaining & cleaning

INTERIOR WOOD

Priming, finishing, maintaining and cleaning



*Basic finishing,
maintenance
and care of wood*

ALL YOU NEED TO KNOW ON OILED FLOORS

www.proffwoodcare.com

Floors produced of wood are getting more and more popular in many countries worldwide. Wood floors are used in both condominiums and commercial areas with great success. When choosing the finish, there are a number of options available from a natural soap finish to lacquer and natural oil. Natural oils are often chosen due to easy maintenance and repair and ecologically friendly finishing. Oil enhances the natural characteristics of the wood grain and produces a silky soft finish. Nowocoat Industrial A/S specializes in soap, lacquer and natural oils for both interior and exterior use.

SPECIAL PROPERTIES OF A PROFF WOODCARE-OILED FLOOR

- HIGH DEGREE OF RESISTANCE TO FLUIDS AND DIRT
- NO MARKS FROM TAP WATER AND NO DISCOLOURATION
- LONG LASTING FINISH SUITABLE FOR HEAVY WEAR, ALSO IN HIGH TRAFFIC AREAS
- PROFF WOODCARE SOAP AND MAINTENANCE OIL ENSURE DURABLE FLOORS
- CERTIFIED AT VARIOUS INSTITUTES IN EUROPE AND ASIA

IMPREGNATING WITH NATURAL OILS

When Oiling, the actual application is highly important – the wood should be saturated with as much oil as possible and as deeply inside the wood grain as possible without leaving a visual coat on the surface. The surface should appear in a rich, beautiful colour – this is the right appearance of oiled wood. The oil is often applied by the manufacturer of the floor as a factory finish but may also be applied on site by a floor finisher after sanding down the oil finish. The Proff Woodcare range offers oils for both factory and floor finisher application. All Proff Woodcare oils ensure high degree of resistance and wear and effortless maintenance.

MAINTENANCE OF OILED FLOORS

Proff Woodcare coconut based Soap makes a perfect silk soft finish on top of a correctly oiled floor. This is how the regular cleaning is done and a Proff Woodcare Maintenance Oil or Proff Woodcare Oil Refresher are applied for rejuvenating the floor. Cleaning with Proff Woodcare Soap is done whenever requested and re-oiling the floor when the floor after one or two years starts to look dry and grey. Any damage to the floor can easily be repaired by sanding down the scratch and re-oil. The repaired area will blend in beautifully after some time and not be noticeable any more.



*Basic finishing,
maintenance
and care of wood*

STRONG POINTS IN FAVOUR OF OILING

www.proffwoodcare.com



- 01 OPEN GRAIN WITH DIRECT CONTACT WITH THE WOOD
- 02 EXCEPTIONAL RESISTANCE TO STAINS FROM ANY LIQUID
- 03 PREVENTION OF STATIC ELECTRICITY
- 04 OPEN GRAIN MAKES REPAIR EFFORTLESS
- 05 WHITE OIL TECHNIQUE FOR LIGHT WOOD SPECIES
- 06 DURABLE FINISH MEANS EASY MAINTENANCE
- 07 REPAIR PRODUCTS AVAILABLE FOR SCRATCHES AND DAMAGES
- 08 TWENTY DIFFERENT COLOUR OILS ENHANCING THE NATURAL GRAIN
- 09 ECO-FRIENDLY PRODUCTS FOR MAINTENANCE



*Basic finishing,
maintenance
and care of wood*

ADVANTAGES OF THE PRODUCT RANGE

www.proffwoodcare.com

The Proff Woodcare programme was developed over more than four decades and is continuously improved focusing on a number of values. This guarantees maximum functionality of the individual products in a complete system from factory to end user.

New developments focus on:

SMART SOLUTIONS

The Proff Woodcare product range is improved through a close cooperation with professionals in the field of wood finishing to the advantage of our users.

INTELLIGENT SERIES

Proff Woodcare products are always improved and developed in series which logically match pre-defined application areas.

ENVIRONMENT

Nowocoat Industrial A/S pursues a high environmental profile of its complete product range – using natural eco-friendly raw materials.

45 YEARS' EXPERIENCE

45 years in surface coating forms a perfect base for preservation, care and renovation of wood reflected in the Proff Woodcare wood care range.



FINISHING OF WOOD FLOORS



PROFF OIL

www.proffwoodcare.com

*Finishing
of wood floors*

Extra white



Light grey



Extra grey




Nougat



Walnut



Light brown

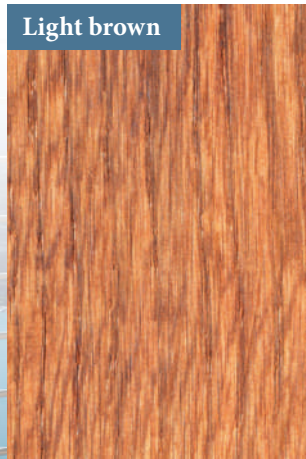

Brandy



Bordeaux



*Finishing
of wood floors*

PROFF OIL

www.proffwoodcare.com

Antique



Brazil brown



Dark brown



Black



Scandinavian quality

DK Proff Olie
UK Proff Oil
DE Proff-Öl
FR Huile Proff

IT Olio Proff
NL Proff-Olie
PL Olej Proff
ES Aceite Proff

COLORS: WIT - WHITE - WEISS - BIALY - BLANC - WIT - BIANCO - BLANCO

VOC FREE



www.proffwoodcare.com

PRIMING

www.proffwoodcare.com

*Finishing
of wood floors*

PROFF LYE, SOFTWOOD LYE, INDUSTRIAL LYE AND DRIFTWOOD LYE


Proff- and Softwood Lye are applied as primers to softwood. Lye is preventing soft wood, i.e. pine and spruce, from maturing. At the same time it also enhances the natural grain of the wood and retains the naturally light colour - producing a white wash finish.

After priming with lye, the surface requires a finish with oil or lacquer.

All primers can be applied with a sponge roller coater or spraying equipment on the production line. Manual application is possible too. Industrial Lye makes no chemical reaction to the wood but produces a white wash finish to oak looking weathered and is applied with a sponge roller.

PROFF WOODCARE POSITIVE STAIN COLOURS

Proff Woodcare water based positive stains are applied in order to colour the wood - regardless of the wood type. The stain is applied with a soft roller coater and afterwards dried in a tunnel with strong heat. It is a positive stain that enhances the natural grain of the wood and produces a beautiful appearance. After staining the wood is ready for oil or lacquer topcoat.

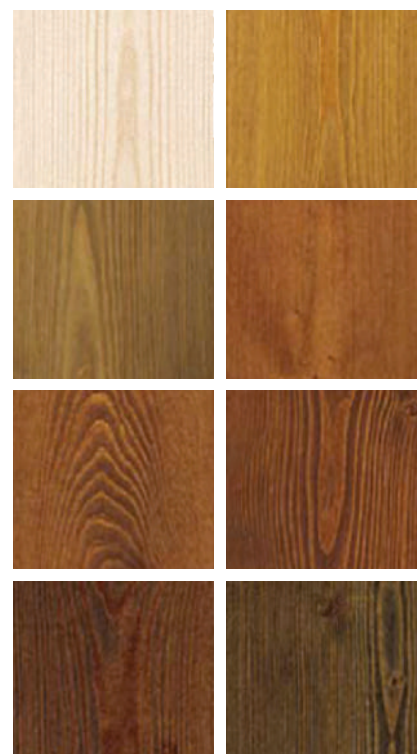

OIL FINISHING OF WOOD FLOORS

www.proffwoodcare.com

*Finishing
of wood floors*

SCANDINAVIAN TRADITION

The oiling of wood floors – what are the advantages? It is an old Scandinavian tradition to impregnate wood with oil as far inside the wood grain as possible where it is left to cure leaving a hardly visible coat of oil on the surface. The saturation of the wood is highly important. The oil finishing systems from Proff Woodcare ensure a deep impregnation of the wood. We offer traditional oxidizing oils which are the original materials and extremely hard wearing and easy maintainable, but also UV Oils.

TRADITIONAL, OXIDIZING OILS

Oxidizing oil are applied with rubber rollers on a lacquering line or with spraying guns. The oil is pressed inside the wood grain with the rollers and buffed in with polishing brushes. The industrial types of the Oils dries within 5 minutes or 30 minutes depending on variation chosen. The oils are available in both solvent and water based type. This coating system creates a hard-wearing and flexible finish which is easy to maintain.

PROFF OIL – 12 COLOURS

Proff Oil is based on a combination of natural hard oil components, developed for production of hard-wearing floors and is VOC free. The natural oil has a solid matter content of app. 70 per cent. It penetrates the grain of the wood easily ensuring a deep impregnation of the wood grain. Proff Oil may be applied with semi-hard rubber rollers on finish line. It may also be sprayed on line. Manual application is also an option. It requires polishing on line with brushes. It also requires drying on racks overnight. The surface is pre-hardened in app. 2 hours.

HIGH SOLID PROFF OIL – 12 COLOURS

High Solid means less oil applied but still ensures additional advantages as to easy application and improved wear and resistance. High Solid Proff Oil has less than 5 per cent of solvent and VOC free. Furthermore the drying is improved and is quicker than the regular Proff Oil.

INDUSTRIAL PRODUCTS

INDUSTRIAL OIL – 20 COLOURS

Industrial Oils are based on a variation of natural hard oil components especially developed for production of hard-wearing wood floors. The oil has a solid matter content of app. 70 per cent. It penetrates the grain of the wood, ensuring a deep saturation of the wood grain. Industrial Oil is for industrial finishing only. It is applied with semi-hard rubber rollers on finishing line. Two to three coats of industrial oil are applied. It requires brushing preferably before the drying tunnel, and it requires buffing with hard brushes before packing. It requires app. 3-6 minutes of drying time in the tunnel at a maximum of 35 degrees Celsius. For coloured oils the drying time is slightly longer.

HIGH SOLID INDUSTRIAL OIL – 20 COLOURS

The properties of this product are the same as mentioned under “Industrial Oil”. However, one important feature of this oil is the reduced quantity of solvent. High Solid Industrial Oil has app. 3 per cent of solvent. Due to the high content of natural oil, the High Solid Industrial Oil produces a harder wearing surface which is also more resistant to fluids such as red wine, coke, and coffee. With the correct application, a slightly shiny surface may be produced with this product. Also the drying is improved and is faster than the normal Proff Woodcare Industrial Oil.

WATER BASED INDUSTRIAL OIL – 20 COLOURS

Free from volatile organic components (VOC)

Water Based Industrial Oil is based on extracts from plants and seeds and is an environment friendly product with water as solvent, and unleaded drying agents. The water based oil has a solid matter content of more than 70 per cent. It penetrates the wood surface easily which ensures a hard wearing surface. Water Based Industrial Oil natural lends a warm colour to the wood with an enhancement of the grain and white leaves a white wash appearance to the surface. The water based oiled surface ensures a hard-wearing and resistant floor.

LINE CONFIGURATION OF OIL SYSTEM

www.proffwoodcare.com

UV OIL




UV OIL WATER BASED – IN ALL COLOURS

Proff Woodcare UV Oil is a natural product based on renewable raw materials. The oil impregnates the grain deeply and ensures a hard wearing coating with the advantageous properties known from traditional oil. Due to the deep impregnation of the oil inside the grain, it may be re-oiled when required and equally cleaned with wood floor soap. The UV Oil is applied on a regular UV lacquering line with intermediate sanding after application of the base coat.

Top coats may be applied once or twice depending on the requirements to the final finish. Priming with stain or lye can be made if particular colours are required. The final appearance of the UV Oil surface is a natural looking wood surface with natural enhancement of the wood grain. The Proff Woodcare UV Oil is extremely unproblematic to apply on an industrial UV lacquering line.

LINE CONFIGURATION OF UV OIL SYSTEM

Substrate requirements: Thickness - 2mm, tolerance max +/-0.2mm

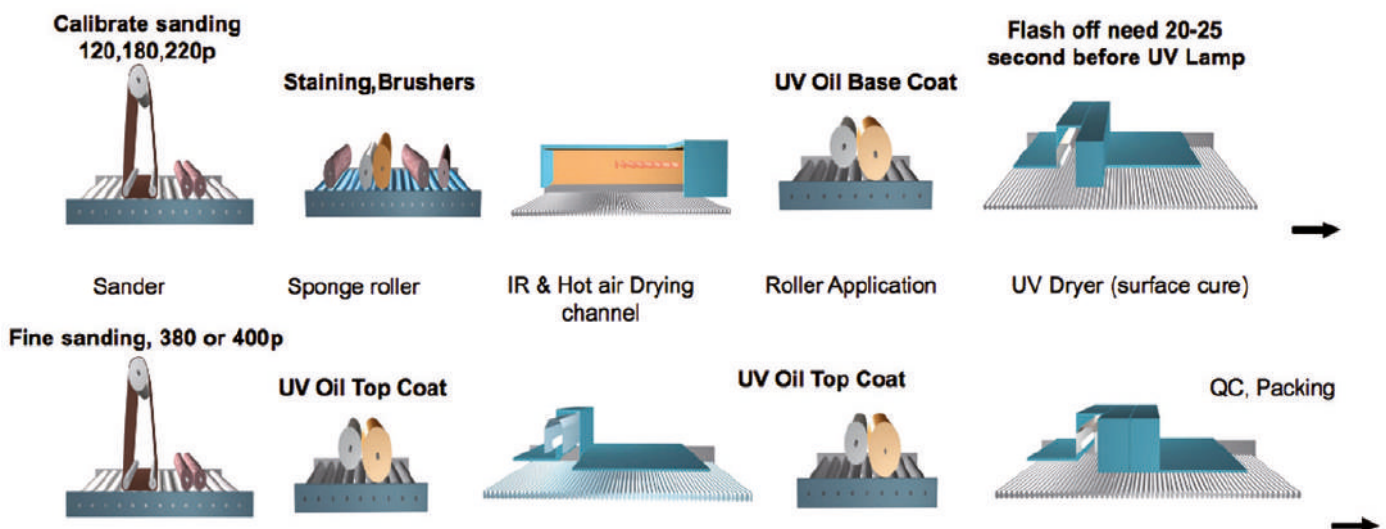


LINE CONFIGURATION OF WATER BASED SYSTEM

www.proffwoodcare.com

*Traditional Oil System
& Water Based System*


LINE CONFIGURATION OF TRADITIONAL OIL SYSTEM

Substrate requirements: Thickness - 2mm/Thickness tolerance max +/-0.2mm

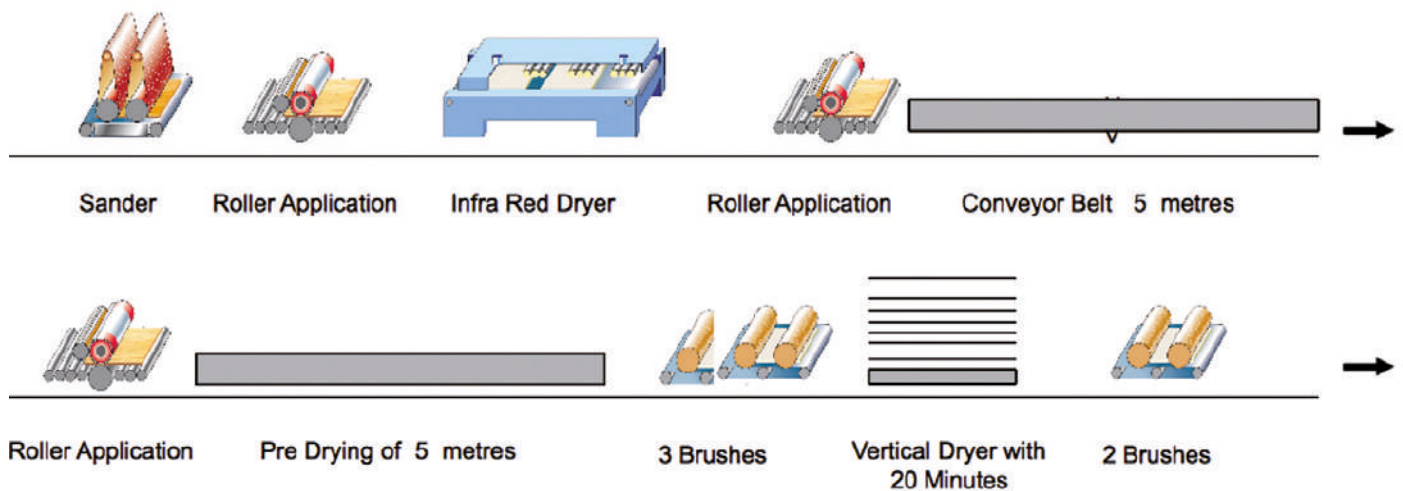

LINE CONFIGURATION OF WATER BASED OIL SYSTEM

Substrate requirements: Thickness - 2mm/Thickness tolerance max +/-0.2mm

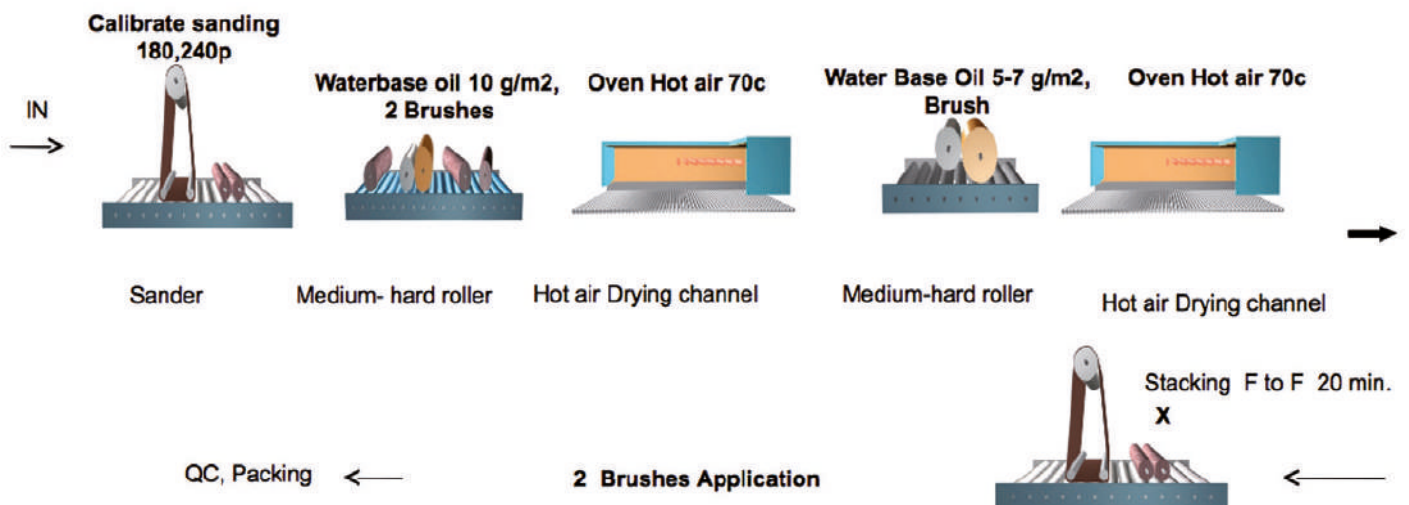

Photos by courtesy of Superfice, Milan, Italy

PROFF WOODCARE IN A SYSTEM

Consumption:
300 m²/ltr

Proff Woodcare offers an easy logical a system – with a complete range of natural products developed through focus on only the best of natural raw materials. The careful selection of raw materials has resulted in a complete range of products for basic finishing, cleaning and maintenance of wood both interior and exterior. No matter the kind of wood species, Proff Woodcare offers the best solutions for oiling and lacquering.

TREATMENT LIGHT HARDWOOD, DARK HARDWOOD & SOFTWOOD

Basic treatment	Priming with lye or positive stain, final finishing with HS Industrial Oil, HS Proff Oil and Soap
Basic cleaning	Basic Cleaner
Weekly/monthly cleaning	Natural Soap, White Soap
Maintenance	Natural Soap, Maintenance Oil, and Oil Refresher

SOAP

Soap is ideal for cleaning and maintaining floors and other wood surfaces. Soap White is used for light wood species and Soap Natural for dark wood species.

Work Instruction:

- Regular cleaning is done with Hoover or broom and it depends on the wear how often cleaning is done.
- Soap White is shaken carefully before use. 1 1/2 dl. Soap is mixed into 5 ltr. of luke-warm water. It is recommended always to work with 2 buckets: one with soap water and one with rinsing water.
- Always use as little water on the floor as possible. Soap water is left on floor long enough in order to dissolve the dirt. Now wipe dirty soap water from floor with hard wrung mop or cloth and rinse mop in bucket with clear water.
- Use a hard wrung mop with soap or cloth to leave protective soap film on floor.

Extremely dirty and neglected floors may first be cleaned with Intensive Wood Cleaner and then with Wood Floor Soap or Oil Refresher.

OIL REFRESHER – NATURAL AND WHITE

Oil Refresher is ideal for cleaning and re-oiling floors and other wood surfaces. Refresher White is used for light wood species and Refresher Natural for dark wood species. Refresher is used for light re-oiling of floor as an alternative to Maintenance Oil.

Work Instruction:

- Daily cleaning is made with vacuum cleaner or broom. The frequency of the floor cleaning depends on the wear on the floor.
- Refresher White is shaken carefully before use. 1 1/2 dl. Refresher is mixed into 5 ltr. of luke-warm water. It is recommended always to work with 2 buckets: one with Refresher water and one with rinsing water.
- Clean the floor with a minimum quantity of water. Leave the Refresher water on the floor briefly in order to dissolve dirt. Remove the dirty Refresher water with a hard wrung mop or cloth and rinse out in the bucket with rinse water.
- Always wipe the floor with hard wrung Refresher water on a mop or cloth in order to re-establish the protective oil film.



Photos by courtesy of Timberman Denmark A/S.

MAINTENANCE

Consumption:
20 m²/ltr



STRONG ADVANTAGES

Maximum protection Suitable for all oiled and oil waxed surfaces Especially well suited for UV oiled floors (factory oiled floors) Quick and easy application Available in Natural and White

MAINTENANCE AND REPAIR OF OILED WOOD FLOORS

Nowocoat Industrial A/S has made a second generation of the Maintenance Oil in order to improve the protection of oiled wooden floors. The Maintenance Oil is generally suitable for all oiled and oil waxed surfaces including UV-oiled floors.




PROFF WOODCARE MAINTENANCE OIL

is used for repair of UV-oiled floors. The Maintenance Oil saturates the wood at the damaged area and re-establishes the protective surface. Maintenance Oil White is mainly used for light wood species and Maintenance Oil Natural for dark wood species.

Work Instruction

1. Sand down the damage to be repaired carefully with sanding paper and make sure to choose the correct grit depending on the depth of the scratch. Final sanding is made with grit 320.
2. Stir the maintenance Oil carefully before use. Apply the maintenance Oil with a brush only onto the area that was previously sanded down.
3. Leave the maintenance Oil to be absorbed for app. 20 min. Remove excess oil cautiously with a piece of cloth. The area should appear oily wet, and do not polish to hard on repaired area.
4. Let the oil harden for app. 1 1/2 hours and buff with the white polishing pad. Application of maintenance Oil may be repeated as described above including the time interval if area is not saturated with oil.

Should the repair area not yet be completely saturated with oil after the first treatment, apply one more coat of Maintenance Oil. Leave the repair area to harden and do not expose to water for 24 hours. Only then the oil is hardened. Notice! Oil wetted cloths, paper, and pads should be burnt after use or disposed of otherwise – risk of self ignition.

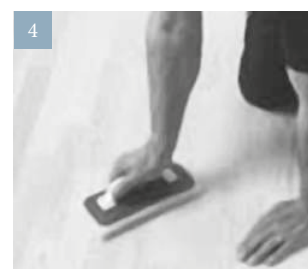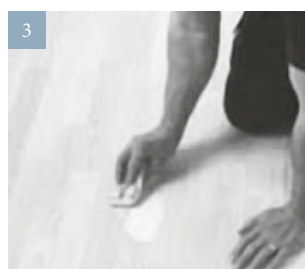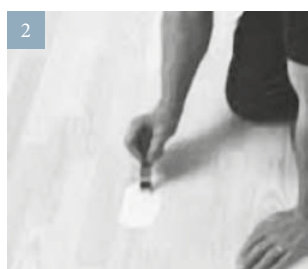

LACQUER CARE

Priming, Finishing, Maintaining & Cleaning



PROFF WOODCARE LACQUER

Lacquered
wood floors

www.proffwoodcare.com

FLOOR LACQUERS

Floor Lacquers from Nowocoat Industrial A/S offers maximum protection of wood floors, especially hardwood floors exposed to heavy-duty in restaurants or hotel lobbies. Through innovation and many years of experience, Nowocoat Industrial A/S has developed some of the best lacquers available and marketed under the Proff Woodcare brand.

Today, the demands and expectations of lacquered floors are very high ranging from high degree of abrasion and wear resistance to chemical resistance, ease of application and essential environmental requirements from professionals and end users who apply the product. Heavy demands on the development of Proff Woodcare lacquers ensure that high expectations of good natural floor finishes are fulfilled.

Whether it is for a condominium, a busy office or airport where traffic is intense, Proff Woodcare can offer only the best in the market for all types of floors. Also when it comes to industrial

application of floor coatings, Proff Woodcare has the best and most natural appearing lacquers with high durability. Nowocoat Industrial A/S has more than 40 years' experience in floor lacquers and treating and protecting wood. So the wood retains its natural appearance and becomes a natural part of the interior of your home, office and public institutions.

CHARACTERISTICS OF A PROFF WOODCARE LACQUERS

MAXIMUM RESISTANT TO WATER, STAINS AND DIRT

HIGH DEGREE OF ABRASION AND WEAR RESISTANCE

LONG DURABILITY

FRIENDLY TO THE ENVIRONMENT

EASY TO KEEP BEAUTIFUL AND CLEAN



www.nowocoat.dk

EXTERIOR WOOD

Priming, Finishing, Maintaining & Cleaning





EXTERIOR WOOD

www.proffwoodcare.com

If used correctly, wood in exterior surroundings is a valuable material and is resistant to all kinds of weather from hot, humid conditions to temperatures below zero and with extremely low humidity. Especially in climates with high humidity, wood is exposed to damaging organisms such as fungus, insects and green growth. This causes wood to deteriorate and decay.

There are several ways of protecting wood. Construction protection of wood is one option using kiln dried wood, moisture insulation and ventilation - and thereby protecting the wood from decay and ensuring long durability.

This is only an option in dry climates. In climates with high humidity, wood will need protection treatment in order to remain in a good condition.

Nowocoat Industrial A/S offers a wide range of products for cleaning, priming, oiling and lacquering wood used in exterior surroundings.



www.nowocoat.dk

EXTERIOR WOOD

www.proffwoodcare.com

*Finishing,
Maintaining & Cleaning*

EXTERIOR CLEANING

Before exterior wood is finished with one of the oils for exterior use, it is important that the wood is cleaned carefully in order to remove grease, dirt and green growth from the surface and the grain of the wood.

The cleaning products from Proff Woodcare are all highly efficient and easy to use. Execute the cleaning in a space with access to drainage and make sure that garden tiles are not stained from the cleaning products. This can be done by spreading a plastic film. Work out of direct sunlight.

EXTERIOR CLEANER

This agent may be used for all exterior wood work – e.g. garden furniture of wood or plastics, garden decking boards or tiles, claddings, garden fences, and wood houses. Exterior Cleaner should be used before finishing new wood also. The cleaner opens the grain of the wood and ensures easy access for the coating material. The oil can penetrate deeper inside the grain and prolong the durability of the finished wood work. The Exterior Cleaner is also used in connection with rejuvenating existing oiled surfaces with new coats of oil.



Finishing,
Maintaining & Cleaning

EXTERIOR WOOD

www.proffwoodcare.com


DEEP CLEANER A + B

Proff Woodcare Deep Cleaner A + B is a dual component solution which strips the wood of fungus and green growth effectively. Deep Cleaner is mainly used for garden furniture and decking boards. In most cases the products are used undiluted – except for pine and oak. To prevent discoloration of the wood, it is recommended to dilute with water: 1 part of Deep Cleaner 1 and 3 parts of water.

Deep Cleaner A dissolves green growth, fungus and old oil applications, and it brings the surface back to the grain of the

wood. The next step is Deep Cleaner B which brings back the natural colour of the wood.

The cleaning with Proff Woodcare Deep Cleaner A + B is easier and more efficient than sanding down the furniture or decking boards. The products will get into gaps and openings which are difficult to sand and this kind of stripping is fast and easy and brings your garden furniture or decking boards back to their natural colour.

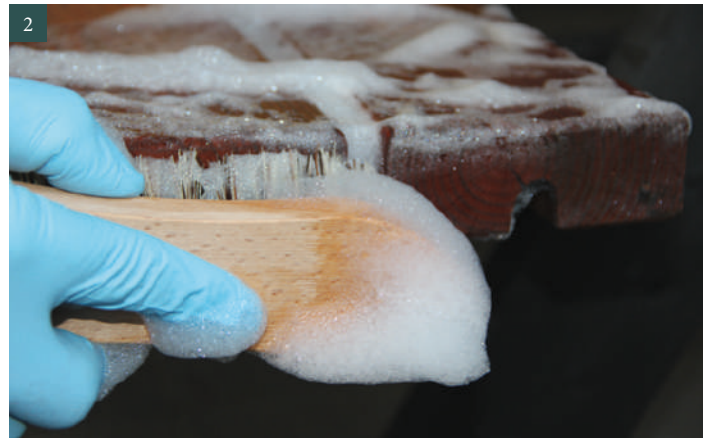

EXTERIOR WOOD

www.proffwoodcare.com

*Finishing,
Maintaining & Cleaning*

Spruce



Larch



Natural



Teak



Bangkirai



Redbrown



Walnut



Olive



Finishing,
Maintaining & Cleaning

EXTERIOR WOOD

www.proffwoodcare.com

White



Silver



Grey



Anthracit




Black



INTERIOR WOOD

Ask for our range of interior wood care

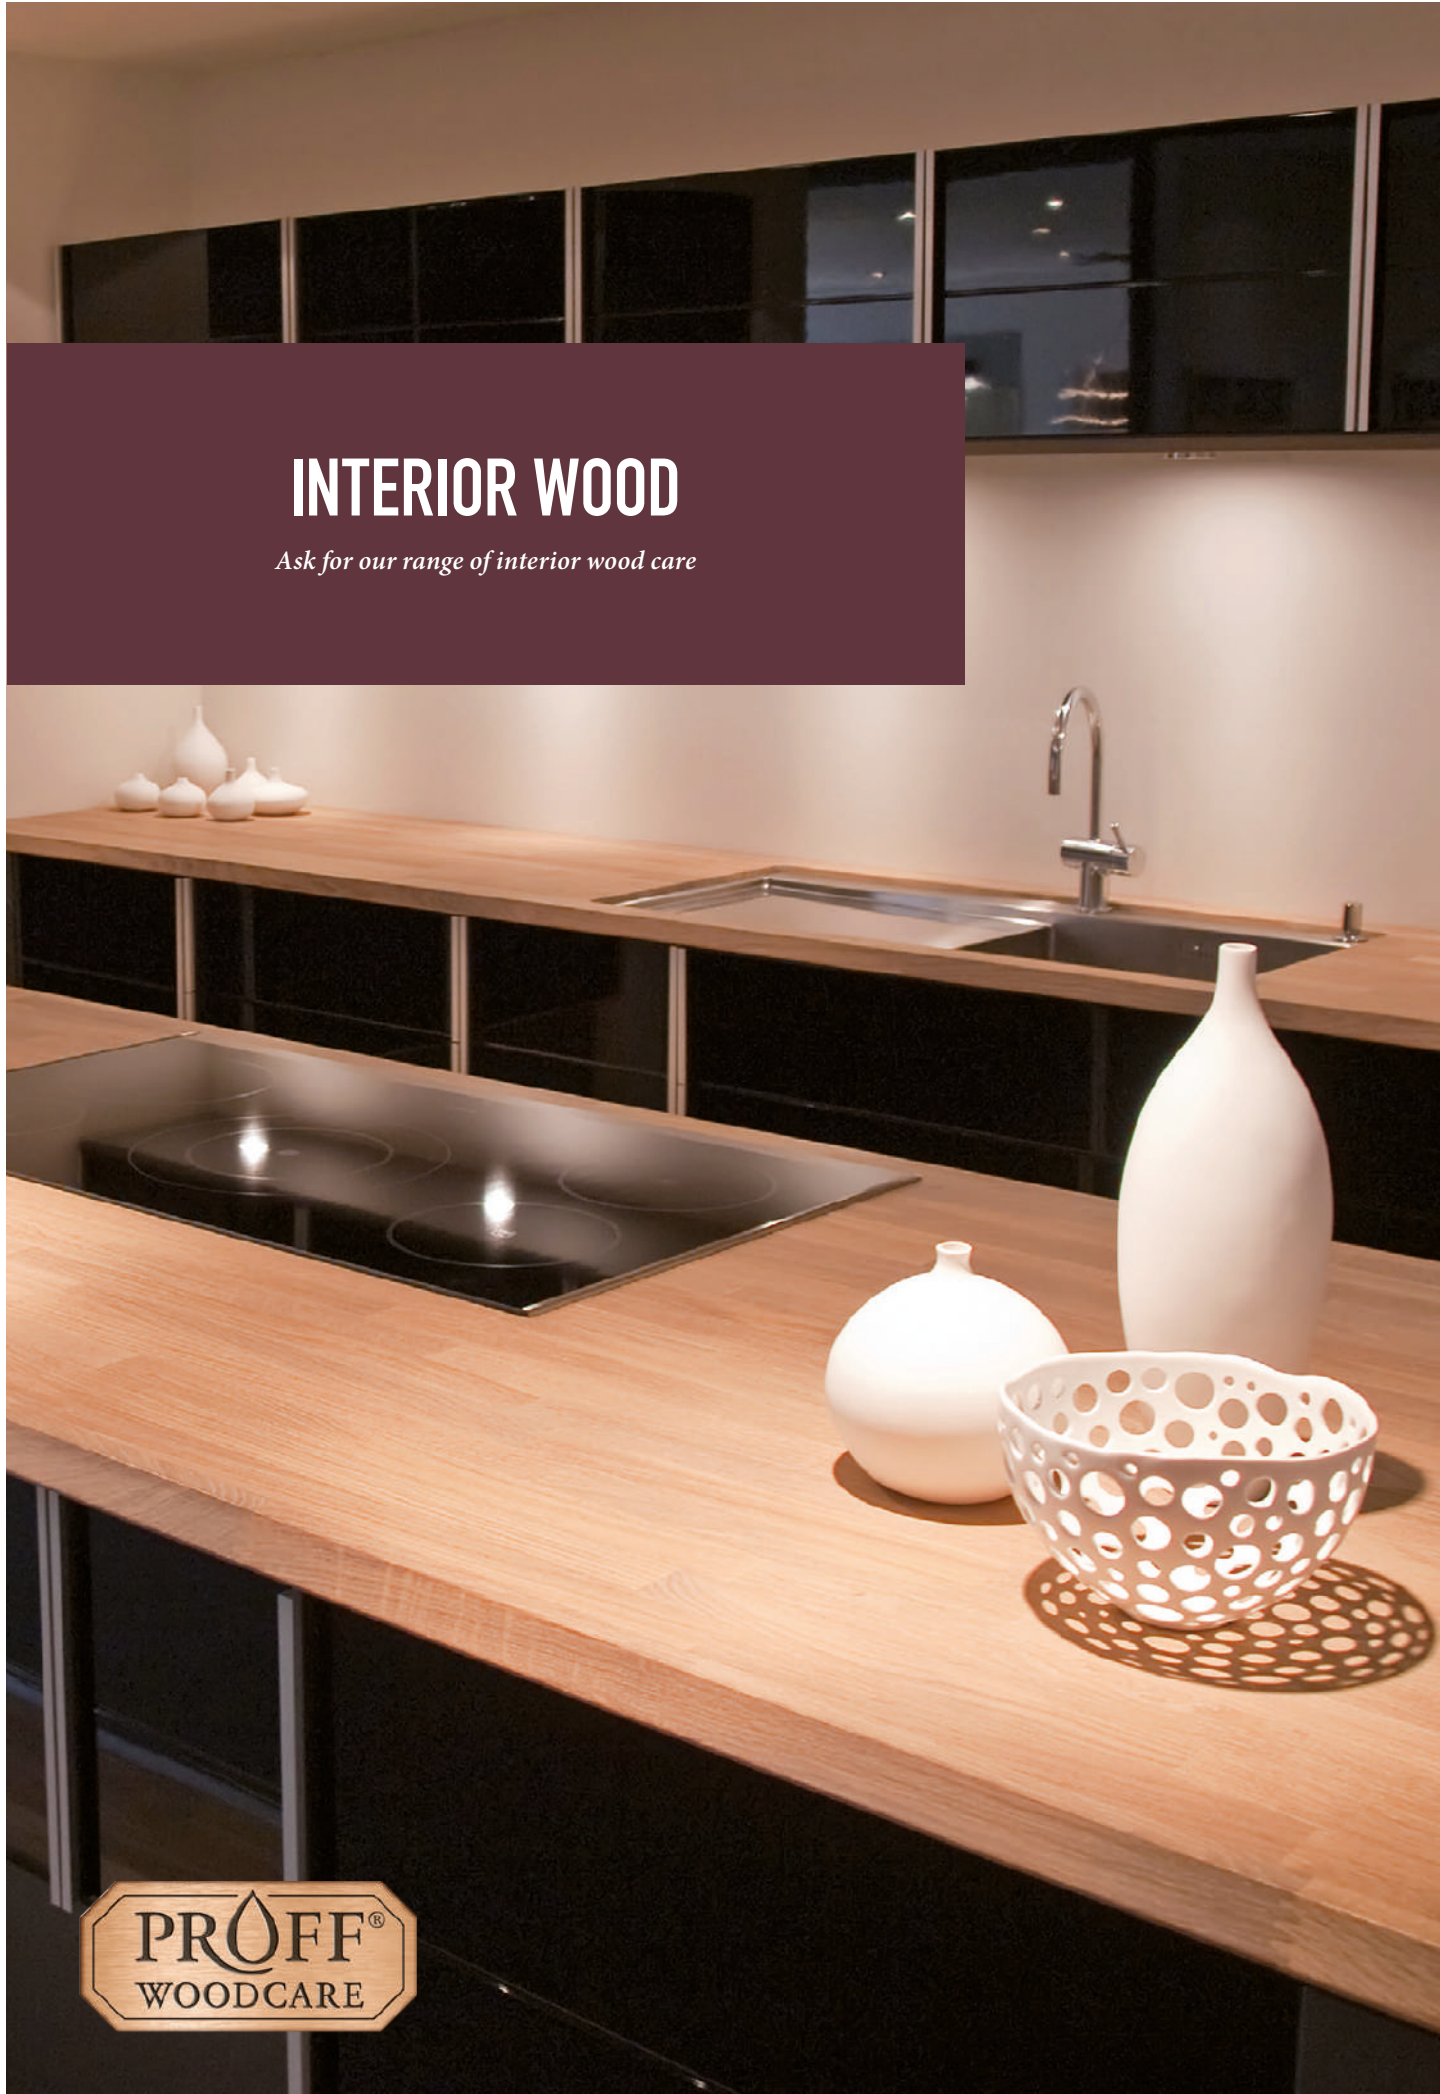

INTERIOR WOOD

www.proffwoodcare.com

Proff Woodcare Worktop Oil is suitable for kitchen worktops and furnitures

PROFF WOODCARE WORKTOP OIL

Proff Woodcare Worktop Oil is suitable for kitchen worktops and furniture. The oil has been certified at FDA meaning that it is safe in connection with food preparation.

The oil saturates the wood and dries very fast leaving an warm colour with an enhancement of the wood grain. The oil is available in transparent and white. White oil is applied to light wood and will intensify the natural wood grain.

The surface will be smooth and attractive and well suited also for furniture. An oiled worktop or an oiled piece of furniture is easy to repair and reoil after cleaning with Proff Woodcare Wood Cleaner.





BASIC & INDUSTRIAL FINISHING

- for woodcare

LYE PRODUCTS

Lye is a primer which gives a white wash surface with visible wood structure and is protecting soft & hard wood from going yellow including producing antiqued colour. After priming, a finish with oil or lacquer is required for protection of the surface.

Colours: *White, Natural and grey*



NEUTRAL LYE

is especially developed to use before a Proff Woodcare Lacquer. Neutral Lye is used for priming and making a white wash surface with visible wood structure and is protecting soft & hard wood from going yellow.

Colours: *White and Super White*



FLOOR-PRIMER

lacquer is a water based NPE and NMP free acrylic primer used as the first layer to most types of wood before using a Proff Woodcare top-coat lacquer. Fast drying and easily sandable.



PRO-HOME LACQUER

is a water based NPE and NMP free acrylic/ PU topcoat. Pro-Home is recommended in homes and rooms with an average traffic. It has excellent filling properties, fast drying and very durable.



PRO-OFFICE LACQUER

is a water based NPE and NMP free PU/ acrylic topcoat. Pro-Office is recommended in offices and hallways etc. with intensive traffic and is highly durable due to the self-crossing properties in the binder.



PRO-HIGH 3-FIC LACQUER 2K

(+ hardener) is a water based 2 component PU topcoat. Pro-High 3-fic is the ultimate lacquer to protect the floor for heavy traffic and has exceptional chemical resistant and therefore recommended in restaurants, schools, stairways etc.



PROFF ANTI-BAC LACQUER

is a water based NPE and NMP free PU/ acrylic topcoat. Proff Woodcare Anti-Bac is non-hazardous and has special innovative properties to reduce bacteria up to 90% within 2 hours. It is recommended in hospitals, gyms, restaurants etc. with high hygienic requirements.



PROFF OIL ANTI-BAC

Proff Oil Anti-Bac is available in natural and white. Proff Oil Anti-Bac is the same as Proff Oil but with new innovative properties to reduce bacteria up to 90% in the course of 2 hours. It is recommended in hospitals, gym, restaurant etc with many people and high hygienic requirements.

Colours: *White and Natural*



BASIC & INDUSTRIAL FINISHING

- for woodcare



PROFF OIL

Proff Oil is available in natural, white and 12 different colours. Proff Oil may be applied either manually or with floor machine. It is recommended to use floor machine for polishing and buffing of the floor. Proff oil is also available as High Solid.

Colours: Wide selection



INDUSTRIAL OILS

Proff Woodcare Industrial Oils are a high solid fast drying oil for application with roller coaters on a line in factory. Industrial Oil is available in natural and white 10% + 15% pigmentation including 20 different colour oils.

Colours: Wide selection



HIGH SOLID INDUSTRIAL OILS

Proff Woodcare High Solid Industrial Oil is available in natural and white 13% + 22%. The solid matter content is 95% and ensures a hard and resistant surface for areas with high traffic.

Colours: White and Natural



WATER BASED INDUSTRIAL OILS

Proff Woodcare Water Based Industrial Oil is available in natural and white 5% and 15% + 20 different colours. The oil is applied on finishing line and need a final buffing before packing. The solid matter content is approx. 60% and the oil ensures a hard wearing and fluid resistant surface.

Colours: Wide selection



WATER BASED UV OILS

Proff Woodcare Water Based UV Oil is available in natural and white 5% and 20 different colours. The oil is applied on finishing line and needs intermediate sanding and several coats of oil and curing.

Colours: Wide selection



WOOD CLEANER

Proff Woodcare Wood Cleaner is a highly efficient detergent for cleaning of extremely dirty floors and before re-oiling of the floor. Wood Cleaner is also used after priming with Lye before application of oil.



SPOT REMOVER

Proff Woodcare Spot Remover is used for dissolving difficult stains from e.g. coffee and red wine. It is very efficient and easy to apply and use.



WOOD FLOOR SOAP

Proff Woodcare Wood Floor Soap is a highly efficient detergent based on coconut and is used for regular cleaning of oiled and waxed wood floors. The soap is available in natural and white. The soap is exceptional mild and leaves a protective coat which is renewed when floor is cleaned next time.

Colours: White and Natural





BASIC & INDUSTRIAL FINISHING

- for woodcare

OIL REFRESHER

Proff Woodcare Oil Refresher is a dual function water based product. It cleans and oils the wood work at the same time. The product is available in natural and white. After drying, the floor or furniture may be buffed.

Colours: *White and Natural*



PROFF SOAP

Proff Woodcare Proff Soap is used for cleaning of commercial areas such as restaurants, hotel lobbies, and airport terminals. The soap is highly efficient and offers also a protection of the surface.

Colours: *White and Natural*



MAINTENANCE PASTE

Proff Woodcare Maintenance Paste is applied with floor machine. It is available in natural and white and offers a highly resistant surface for heavy wear. The paste is suitable for all installations including large areas with high traffic such as airport terminals and hotel lobbies.

Colours: *White and Natural*



MAINTENANCE OIL

Proff Woodcare Maintenance oil is easy to apply from hand or with a polishing machine with polishing pad. It dries very fast. Maintenance oil is available in natural and white.

Colours: *White and Natural*



ISOFIN SOAP

Proff Woodcare Isofin Soap with wax is used as basic treatment of untreated and lye primed floors. It is a soft and easy way of finishing floors of any wood species. The combination of wax give a nice and super protecting surface to stains and is easy to clean.

Colours: *White and Natural*



LACQUER CARE

Proff Woodcare Lacquer Care is for polishing of lacquered wood floors. Lacquer Care offers extra protection of the wood and removes minor damages and scratches from the surface. Lacquer care may also be used for maintenance of laminate and vinyl surfaces.



LACQUER SOAP


Proff Woodcare Lacquer Soap is used for cleaning of lacquered floors including laminate and vinyl floors. It is a highly efficient and mild cleaner.



PANEL WHITE

Proff Woodcare panel white is a waterbased product to make a white wash surface with visible wood structure and is protecting the wood from going yellow.

Colours: *Wide selection*



INTERIOR WOOD

- for woodcare



WORK TOP OIL

Proff Woodcare Work Top Oil is FDA certified and used for oiling of kitchen work tops and furniture. The oil offers a perfect protection of the wood and makes maintenance easy. The oil is available in natural and white and fast drying.

Colours: *White and Natural*



EXTERIOR WOOD CLEANER

Proff Woodcare Exterior Wood Cleaner is highly efficient for basic cleaning of any exterior wood such as fences, garden furniture and decking boards. It cleans deeply inside the grain and offers also protection against green growth.



EXTERIOR WOOD

- for woodcare

DEEP CLEANER A+B


Proff Woodcare Deep Cleaner A + B is a dual system stripping the wood of green growth and old oil residues. Deep Cleaner A strips the wood and Deep Cleaner B brings the original colour of the wood back. It is a system cleaning solution and therefore both products must be used



EXTERIOR WOOD OIL

Proff Woodcare Exterior Wood Oil is water based oil especially suitable for exterior wood of any kind. It offers protection against ultra violet rays from the sun and has water repellent components preventing water from entering the surface. The oil is available in a large number of colours.

Colours: *Wide selection*



EXTERIOR DECKING OIL

Proff Woodcare Decking Oil is vegetable based oil especially suitable for oiling of decking boards. It offers protection against the ultra violet rays from the sun and has water repellent components built in.

Colours: *Wide selection*



GARDEN FURNITURE OIL

Proff Woodcare Garden Furniture Oil, spray, is mainly used in connection with re-oiling of garden furniture. The oil is available in natural and teak colour. The oil offers protection against ultra violet light and has also water repellent components.

Colours: *Natural and teak*





ALL Proff Woodcare products are tested for a number of heavy metals and recommended for children's toys.



Scandinavian quality



NOWOCOAT INDUSTRIAL A/S

Staalvej 3 · 6000 Kolding · Denmark
Tel: +45 7550 1111 · mail@nowocoat.dk

